

S-C-C662A-10-Z33

1T 2MP Intelligent PTZ Dome Camera



Features

- ❖ 1TOPS computing power
- ❖ Supports crowd flow analysis, object (motor vehicle, non-motorized vehicle, and pedestrian) classification, vehicle recognition, vehicle event detection, and traffic flow statistics
- ❖ Supports backlight adaptation, overcast adaptation, and speed adaptation 1/2.7" CMOS sensor
- ❖ Online loading and upgrade of algorithms
- ❖ 120 dB super wide dynamic range (WDR), ensuring that both foreground and background objects are clearly identified in environments with sharp light contrast



Technical Specifications

Model		S-C-C662A-10-Z33
Major Specifications		
Main control	Computing power	1TOPS
	Memory	DDR3 0.5 GB
	Flash type	SPI NAND Flash 512.0 MB
	Max capacity	MicroSD card slot that supports microSDHC/microSDXC; maximum memory card capacity: 256 GB
Camera	Focal length	5-165mm
	Max Aperture	F1.6 (W) to F4.4 (T)
	Image sensor	1/2.7" CMOS/2MP 1920(H)*1080(V)
	Lens aperture type	DC-Iris
	Angle of view	Horizontal: 2.4° (T) to 59° (W); vertical: 1.4° (T) to 33.6° (W)
	IR range	200m
	Digital zoom	Supported
PTZ	PTZ rotation angle	Pan: 0° to 360° Tilt: -15° to +90°
	Pan speed	Manual: 0.1-160°/s Speed for moving to the preset position: 240°/s
	Tilt speed	Manual: 0.1-120°/s Speed for moving to the preset position: 200°/s
	Park action	Supported
	Tour	Supported
	Preset position	256 (including one home position)
	Home position	One home position
Intelligence		
Vehicle	License plate recognition	License plates from the Chinese Mainland
	Vehicle analysis	Vehicle color/Vehicle type
	Traffic flow statistics	Motor vehicle/Non-motorized vehicle/Pedestrian
Other intelligences	Crowd flow analysis	Queue length/Head counting/Crowd flow statistics
	Non-motorized vehicle	Supported
	Defocus	Supported
Open ecosystem		
Algorithm openness	Open OS	Supported
Data openness	Data openness	SDK (proprietary protocol)/REST API (proprietary protocol)/GA/T 1400/GB/T 28181 (2011, 2016)



Image		
Codec	Video encoding format	MJPEG/H.264/H.265
	Video encoding channels	Triple streams
	Intelligent encoding	Extra265/264
	Video frame rate	Configurable (60 fps, 50 fps, 30 fps, or 25 fps); default value: 25 fps
Image AI	Scene adaptation	Backlight adaptation/Overcast adaptation/Speed adaptation
Image ISP	Min illumination	Color: 0.005 lux (F1.2, AGC ON, 1/30s shutter speed); B/W: 0.0005 lux (F1.2, AGC ON, 1/30s shutter speed)
	Day/Night mode	Supported; automatic (ICR)/Color/B/W (default: automatic) Sensitivity level: high (default), medium, and low Image triggering /Internal triggering
	WDR	120 dB
	White balance	Auto/Auto tracking/Manual/OnePush
	Highlight compensation	Supported
	Digital noise reduction	2D/3D noise reduction
	Defogging	Supported
	EIS	Supported Sensitivity levels are not supported.

Networking		
Network transmission	Protocols supported by IPv4	TCP,UDP,IPv4,DHCP,DNS,ICMP,IGMP,HTTPS,FTP,SFTP,RTP,RTSP,RTCP,SIP,ARP,SSL,NTP,SNMP(V1/V2/V3),802.1x,QoS,SMTP,PPPOE
	Protocols supported by IPv6	HTTPS,RTP,RTCP,RTSP,Onvif,IPv6,ICMPv6,DHCPv6

Security		
Data security	Media security	AES256-based SDK stream encryption; encrypted storage of video and images on SD cards
Service security	User rights	Three user roles: administrator, advanced operator, and common operator
	Security mode	User name and password authentication, 802.1X authentication, and HTTPS digital certificate
	Secure boot	Supported
	System intrusion detection	Supported


Port	
Storage port	MicroSD card slot that supports microSDHC/microSDXC; maximum memory card capacity: 256 GB
Alarm port	2 input ports and 1output port
Network port	One RJ45 10M/100M adaptive Ethernet port
Audio port	Supported (one-channel LINE IN or one-channel external MIC)/Supported (one-channel LINE OUT)



General Specifications	
Power type	24 V AC and PoE (IEEE 802.3at)
Power consumption	Maximum: 22 W; typical: 6.5 W
Operating temperature	-30°C to +60°C (illuminator disabled) -30°C to +40°C (illuminator enabled)
Operating humidity	5% to 95% (non-condensing)
Surge protection	6 kV
IP rating	IP66
Equipment Anti Corrosion	Class C corrosion resistance
Weight	Net weight 3.7 kg;Gross weight 4.76 kg
Dimensions	Device dimensions φ 202 mm x 309 mm;Package dimensions 280 mm x 390 mmx 290 mm



Dimensions

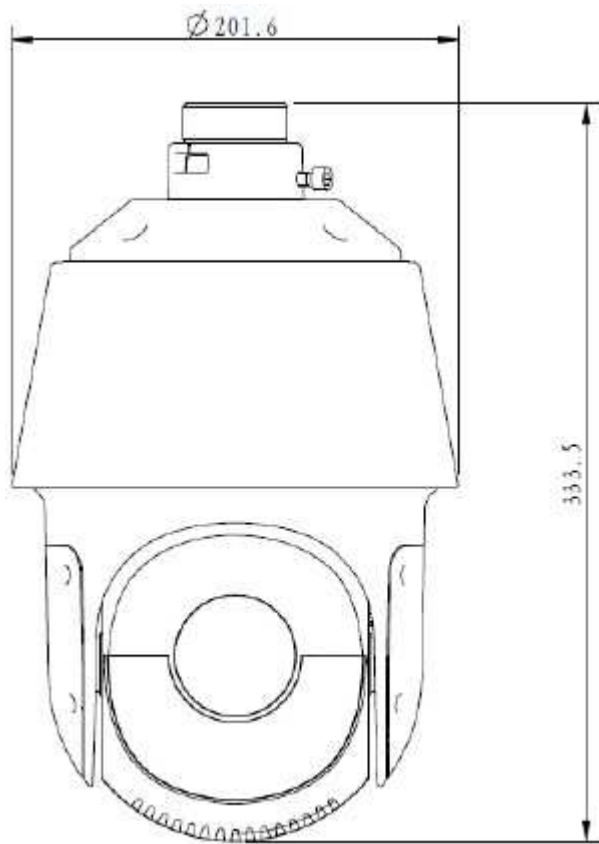

Recommended Accessories



S-C-ACC3651



S-C-ACC3631



S-C-ACC3621

