

S-C-M674B-10-Z40-E2

2T 4MP Dual-Lens AI PTZ Dome Camera



Features

- ❖ 2 TOPS computing power
- ❖ Supports omni-data structuring, automatic tracking, behavior analysis, crowd flow analysis, target detection, person detection, object classification (motor vehicle, non-motorized vehicle, and pedestrian), vehicle recognition, vehicle event detection, and traffic flow statistics
- ❖ Supports backlight adaptation and overcast adaptation 1/1.8" CMOS sensor
- ❖ Online loading and upgrade of algorithms
- ❖ 120 dB super wide dynamic range (WDR), ensuring that both foreground and background objects are clearly identified in environments with sharp light contrast
- ❖ Parking violation detection
- ❖ Dual camera modules for both panoramic view and detail capture Axis deviation correction for dual-lens self-calibration Agglomerate fog detection based on deep learning algorithms
- ❖ Image stabilization based on six-axis gyroscope and AI to ensure image quality
- ❖ Built-in electronic compass and accelerometer, reflecting the PTZ direction and tilt range in real time Supports omni-data structuring



Technical Specifications

Model	S-C-M674B-10-Z40-E2	
Major Specifications		
Main control	Computing power	2 TOPS
	Memory	DDR4 2.0 GB
	Flash type	SPI NAND FLASH 512.0 MB
	Max capacity	MicroSD card slot that supports microSDHC/microSDXC; maximum memory card capacity: 256 GB
Camera	Focal length	Wide-angle prime lens: 5 mm Zoom lens: 6–240 mm
	Max Aperture	Wide-angle prime lens: F1.0 Zoom lens: F1.35 (W) to F4.6 (T)
	Image sensor	1/1.8" CMOS/Wide-angle prime lens: 4MP: 2560 (H) x 1440 (V) Zoom lens: 4MP: 2560 (H) x 1440 (V)
	Lens aperture type	Precise iris (P-iris)
	Angle of view	Wide-angle prime lens: 95° (horizontal); 50° (vertical) Zoom lens: horizontal: 2° (T) to 60.9° (W); vertical: 1.2° (T) to 35.3° (W)
	IR range	200m
	Illumination distance	30m
	Digital zoom	Supported
PTZ	PTZ rotation angle	Pan: 0° ~ 360° Vertical-10° ~ 90°
	Pan speed	Manual: :0.1° to 160°/S Speed for moving to the preset position:240° /S
	Tilt speed	Manual: :0.1 to 120°/s Speed for moving to the preset position:200°/s
	Park action	Supported
	Tour	Supported
	Preset position	256 (including one home position)
	Home position	One home position



Intelligence		
Target/Body	Target	Target detection/Target enhancement/Target attribute recognition
	Target recognition	Supported
	Person	Person detection/Personal attribute recognition
Vehicle	License plate recognition	License plates from the Chinese Mainland
	Vehicle analysis	Vehicle color/Vehicle type/Vehicle model
	Traffic flow statistics	Motor vehicle/Non-motorized vehicle/Pedestrian
Other intelligences	Omni-Data Structuring	Supported
	Behavior analysis	Fast movement/Tripwire crossing/Intrusion/Area entry or exit /Loitering
	Crowd flow analysis	Queue length/Head counting/Crowd flow statistics
	Non-motorized vehicle	Supported
	Vehicle event detection	Parking violation
	Intelligent tracking	Supported
	Defocus	Supported
Open ecosystem		
Algorithm openness	Open OS	Supported
Data openness	Data openness	SDK (proprietary protocol)/REST API (proprietary protocol)/GA/T 1400/GB/T 28181 (2011, 2016)
Image		
Codec	Video encoding format	MJPEG/H.264/H.265
	Video encoding channels	Dual streams
	Intelligent encoding	Extra265/264
	Video frame rate	Zoom lens: configurable (30 fps or 25 fps) Wide-angle prime lens: configurable (30 fps or 25 fps)
Image AI	Scene adaptation	Backlight adaptation/Overcast adaptation
Image ISP	Min illumination	Color: 0.005 lux (F1.2, AGC ON, 1/30s shutter speed); B/W: 0.0025 lux (F1.2, AGC ON, 1/30s shutter speed)
	Day/Night mode	Supported; automatic (ICR), color (default), B/W, and scheduled Sensitivity level: high (default), medium, and low Image triggering /Internal triggering
	WDR	120dB
	White balance	Auto/Auto tracking/Manual/OnePush
	Highlight compensation	Supported
	Digital noise reduction	2D/3D noise reduction
	Defogging	Supported
EIS	Supported; Supports sensitivity levels.	



Networking		
Network transmission	Protocols supported by IPv4	TCP, UDP, IPv4, DHCP, DNS, ICMP, IGMP, HTTPS, FTP, SFTP, RTP, RTSP, RTCP, SIP, ARP, SSL, NTP, SNMP (V1/V2/V3), 802.1X, QoS, SMTP, and PPPoE. Note: The northbound protocol needs to adapt to the PPPoE dialup scenario.
	Protocols supported by IPv6	HTTPS, RTP, RTCP, RTSP, Onvif, IPv6, ICMPv6, DHCPv6


Security		
Data security	Media security	Supports web- or SDK-based media stream encryption; supports a maximum of two channels of encrypted media streams; supports encrypted data storage on SD cards
	Video digital watermark	Supported
	Image digital watermark	Supported
Service security	User rights	Three user roles: administrator, advanced operator, and common operator
	Security mode	User name and password authentication, 802.1X authentication, and HTTPS digital certificate
	Secure boot	Supported
	System intrusion detection	Supported

Port	
Storage port	MicroSD card slot that supports microSDHC/microSDXC; maximum memory card capacity: 256 GB
Alarm port	4 input port and 2 output port
Network port	Two RJ45 10M/100M adaptive Ethernet ports
Communication serial port	RS-485 port
Audio port	Supported (one-channel LINE IN or one-channel external MIC)/Supported (one-channel LINE OUT)

General Specifications	
Power type	AC24V, POE (IEEE 802.3bt)
Power consumption	Maximum: 54.1W, typical: 15.5W
Operating temperature	-40°C to +60°C (illuminator disabled) -40°C to +40°C (illuminator enabled)
Operating humidity	5% to 95% (non-condensing)
Surge protection	6kV
IP rating	IP66
Equipment Anti Corrosion	Class C corrosion resistance
IK rating	IK10 (except for the viewing window)
Weight	Net weight 7.6kg; Gross weight 9.4kg
Dimensions	Device dimensions \varnothing 242.5mm \times 414.6mm; Package dimensions 590mm \times 325mm \times 355mm



Dimensions

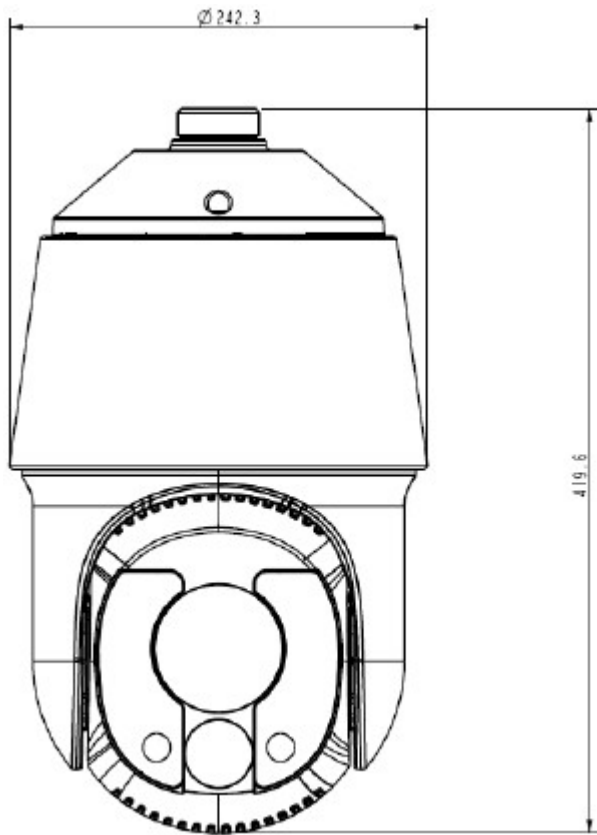

Recommended Accessories



S-C-ACC3651



S-C-ACC3631



S-C-ACC3621

